


Shenzhen Jiashuo Lighting Technology Co Ltd

East Part 1F1,E Bldg, Huachuangda Tech Park, Xixiang, Bao'an, Shenzhen, China

Tel: 86-755-26687925, Website: <http://www.szjiashuo.com>

Outdoor LED Wall Solution 1--PH37.5

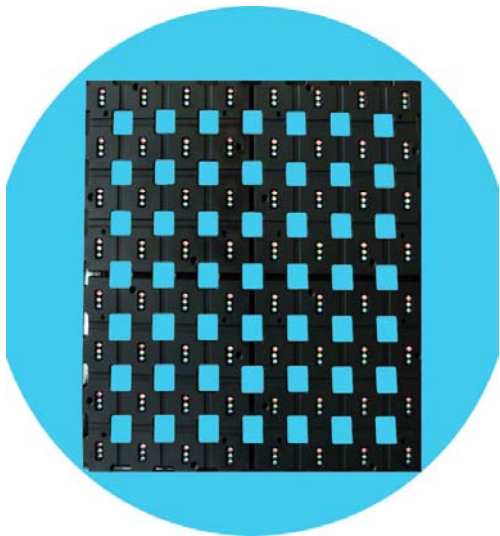

600x600mm



Technical Data

Items	unit	Value
Pixel Brightness	nit	2,000
Viewing angle - Horizontal (50% brightness)	deg	100 (+50/-50)
Viewing angle - Vertical (50% brightness)	deg	55 (+25/-30)
Panel weight	kg	15
Panel width	mm	600
Panel height	mm	600
Panel depth	mm	100
Panel material		iron
Ingress protection (front/rear)	IP	IP65/IP65
Operating temperature range	deg. C	-20 to +50
LED type and configuration	R/G/B	1R,1G,1B
Pixel pitch	mm	37.5
Pixel matrix per 1M		16x 16
Lines per meter		27
Recommended minimum viewing distance	m	60
Colours	million	16.7
Contrast ratio		2,000:1
Video frame rate	Hertz	50/60

Input power frequency	Hertz	50 to 60
Input power (max)	Watts	150/m2
Lifetime (50% brightness)	hours	>60,000
Input format		DVI