


JSL Shenzhen Jiashuo Lighting Technology Co., Ltd.

Last Part, 1/F1, Tower E, Huachuangda Tech Park, West Hangcheng Rd, Xixiang, Bao'an, Shenzhen, China

Tel: 86-755-26687925 Fax: 86-755-26805892

Email: czexcel@gmail.com, sales@szjiashuo.com Website: www.szjiashuo.com

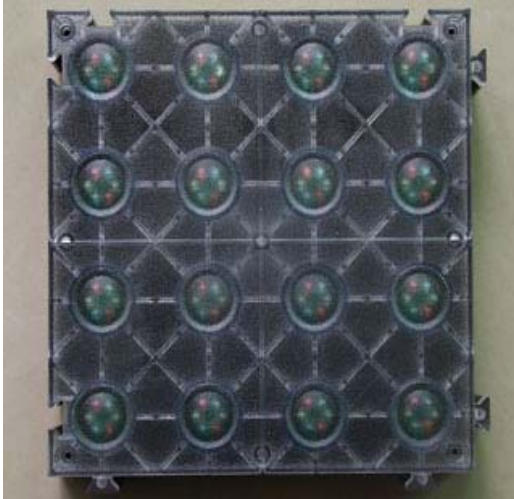

LED Floor Tile

Item	Unit	Data
Pitch	mm	50
Brightness	cd/m ²	> 2200
Color temperature for whiteness	k	6,500
Viewing angle at 50% brightness	degree	100
Viewing angle at 50% brightness	degree	55
Weight of cabinet	kg	1.2
Material of cabinet		PLASTIC
IP protection for cabinet	IP	IP65
Working temperature	°C	-20 to +50
Pixel composition	R/G/B	2,2,2
Pixel array for module		4*4
Size of led module	mm	200x 200
Color displayed		16.7 million
Digital processed	bit	16
Controlling system model		JSL
Reframe frequency	Hz	60
Driving mode		static
Input voltage	VAC	110 to 240
Max power consumption	Watts/m ²	240
Mini power consumption	Watts/m ²	160
Lifespan at 50% brightness	Hours	60,000
Wavelength for red	nm	625
Wavelength for red	nm	532
Wavelength for red	nm	470